



# CPA1

## Capacitance Adapter

### ***ALLOWS DMM'S TO MEASURE CAPACITANCE***

- Measures from 0.01 to 400 microfarad ( $\mu\text{F}$ )
- Works with all meters that measure DC millivolts and have standard 3/4" inputs
- LED power-on indicator doubles as a low-battery indicator
- Uses one standard 9 Volt battery



# CPA1 • Capacitance Adapter


The CPA1 is compatible with digital multimeters and clamp-on meters that can measure 0.1 volts DC and have standard (3/4 inch apart) input jack spacing. The off/on LED will indicate when power is on and let you know when your batteries are growing weak. One year limited warranty.

## Specifications

Measurement Range	0.01 $\mu$ F - 100 $\mu$ F
Operating Temperature	32° to 122°F (0° to 50°C)
Output Voltage	0.1 millivolt per 0.01 $\mu$ F (40 $\mu$ F Range) 0.1 millivolt per 0.1 $\mu$ F (400 $\mu$ F Range)
Battery Type	9 Volt, NEDA 1604 or 6F22, 006p
Weight	4.87 oz. (138 g)
Size	4/8" x 1-5/8" x 1-3/8" (104 mm x 42 mm x 37 mm)

Range	Resolution	Accuracy
40 $\mu$ F	0.01 $\mu$ F	2.5% + 5 digit
400 $\mu$ F	0.1 $\mu$ F	2.5% + 5 digit

**NOTE:** Some capacitors are labeled as "MF" in place of " $\mu$ F" to indicate microfarad.

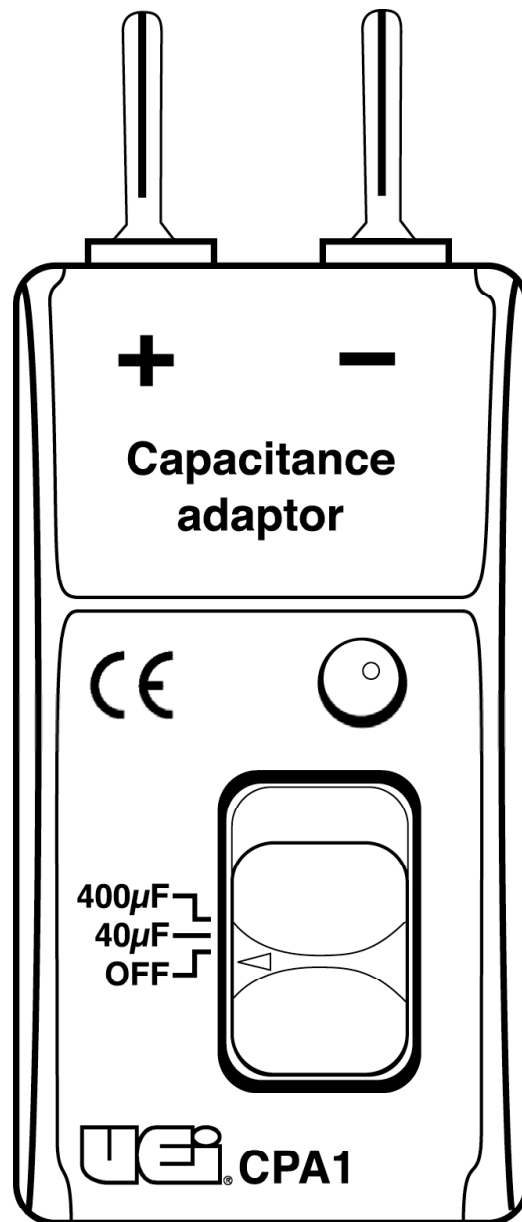

Distributed By:



1-800-547-5740 • Fax: (503) 643-6322  
www.ueitest.com • Email: info@ueitest.com

### IN CANADA

Vancouver: Phone: 1-877-475-0648 • (604) 278-4511 • Fax: (604) 278-8299  
Toronto: Phone: 1-877-475-0648 • Fax: (905) 238-5117

### IN EUROPE

Phone: +44 1707 375550 • Fax: +44 1707 393277

