



Combustion Analyzer with EOS CO₂ sensor technology and High altitude compensation



Dynamic Warranty

- 1-Year Limited Warranty
- Warranty is extended one year with each annual recertification, up to 6 years

Includes

- C165 analyzer
- Stainless steel flue probe w/ 6.5 ft hose (KMCP2)
- Inlet tube connector 2 (SM11103)
- K-type temperature probes 2 (ATT29)
- Particle filter (spare) (17631)
- AC adapter (ACA4)
- 11000 Tubing
- Infrared printer (IRP-2)
- Paper roll spare (16646)
- Hard case (AC509)
- Rechargeable batteries 3 (AA)
- Quick Start Guide

Functions

- Flue temperature: 32° to 1112°F
- Inlet temperature: Internal sensor 32° to 112°F
- Inlet temperature: External sensor 32° to 1112°F
- O₂: 21%
- CO: 2000 ppm
- CO₂: 20%
- Efficiency Nett/Gross 99.9%
- Efficiency: High (calculated) 119.9%
- Excess Air: 250%
- CO/CO₂ ratio: 0.999
- Differential pressure

Features

- EOS Technology
- Pre-programmed fuels: Natural Gas, Propane, Butane, LPG, Light Oils (28/35 sec), Wood Pellets, Town Gas, Coke Gas, Bio Gas, Bio Fuel
- Memory positions: 30
- 6 line backlit display
- High Altitude compensation
- User customizable parameter views
- Individual report printouts
- Real time clock
- 1-Year limited warranty

Downloads



Manual



Data Sheet





Specifications

TEMPERATURE MEASUREMENT

Parameter	Range	Resolution	Accuracy
Flue temperature	32° to 1112°F	0.1°F	+3.6°F +0.3% rdg
Inlet temperature (internal sensor)	32° to 112°F	0.1°F	+1.8°C +0.3% rdg
Inlet temperature (external sensor)	32° to 1112°F	0.1°F	+3.6°F +0.3% rdg

FLUE GAS

Parameter	Range	Resolution	Accuracy
Oxygen	0 to 21%	0.1%	+0.3%
Carbon Monoxide	0 to 20ppm	1ppm	+3ppm +5% rdg
	21 to 2000ppm		
	Above 2000ppm Purge pump operates		Unspecified
Carbon Dioxide	0 to 20%	0.1%	+0.3% volume
Efficiency (Net or Gross)	0 to 99.9%	0.1%	+1.0% rdg
Efficiency High (C)	0 to 119.9%	0.1%	+1.0% rdg
Excess Air	0 to 250%	0.1%	+0.2% rdg
CO/CO2 ratio	0 to 0.999%	0.0001	+5% rdg

PRESSURE (DIFFERENTIAL)

Parameter	Range	Resolution	Accuracy
Nominal range ±80mbar max over range without damage is ±400mbar	±0.08" WC (+0.2mbar)	Maximum 0.001" WC <9.9999" WC 0.001" WC >10.00" WC (0.001mbar <24.99mbar) (0.01mbar >25mbar)	±0.0002" WC (±0.005mbar)
	±0.4" WC (±1mbar)		±0.01" WC (±0.03mbar)
	±32" WC (±80mbar)		+3.6°F +0.3% rdg

PRE-PROGRAMMED FUELS

Natural Gas, Propane, Butane, LPG, Light Oils (28/35sec), Wood Pellets, Town Gas, Coke Gas, Gio Oil, Bio Gas

USER PROGRAMMED FUELS

5 User defined fuels

STORAGE CAPACITY

- 60 Combustion tests
- 20 Pressure & Temperature Tests
- 20 Heat Exchanger Tests
- 20 Temperature Tests
- 20 Commissioning Tests

Backed by Industry-Leading Service

- 2-Business day turnaround on standard recertification
- Flat rate pricing
- ISO/IEC Accredited Facilities (Indianapolis and Vancouver B.C.)
- NIST
- Factory-certified technicians




No O2 Sensor - What it means to you

The Challenge

Direct contact between flue gases and O2 sensors will eventually wear down the sensor and force costly replacement.

Even when your analyzer is "off" the O2 sensor is still in Oxygen, accelerating the process.

Over your analyzer's lifetime, the cost adds up.

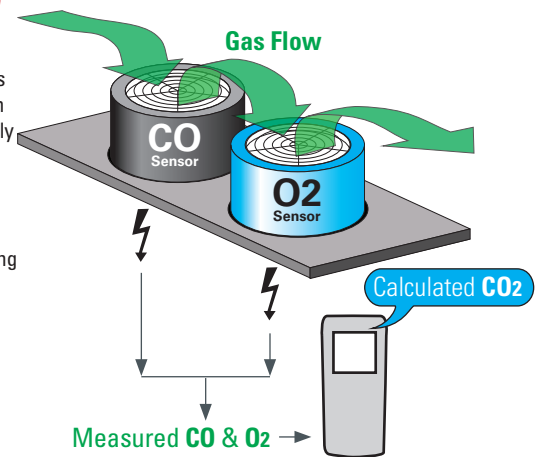


The Solution

Replace the Oxygen sensor with UEi's "EOS" Carbon Dioxide (CO2) sensor. Our technology protects the sensor because flue gases don't make direct contact with it.

Because the sensor is not wearing down, there's less risk of inaccurate calculations.

No O2 sensor to replace means lower cost of ownership.

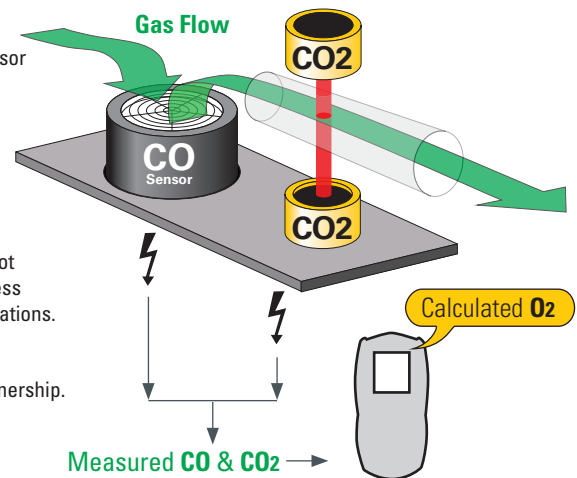

One Less Sensor to Worry About!